

# Hospitality Casters And Wheels




- Hotels, Motels and Resorts
- Laundry and Linen Services
- Hospitals and Institutions
- Restaurants

# ALBION®

[www.albioninc.com](http://www.albioninc.com)

# 14 Polished Brass Pneumatic Hospitality

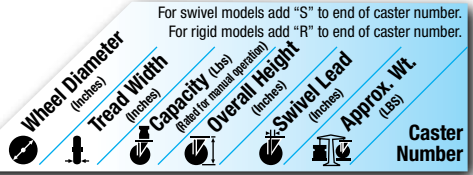

**14 Series Caster with Pneumatic Wheel**

	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Caster Number
<b>Black Tread</b>	8	2.50/4	210	9 1/2	1 3/4	6 1/2	14SF08427S002
<b>Grey Tread</b>	8	2.50/4	210	9 1/2	1 3/4	6 1/2	14SF08427S004

**SF** Rigid change S to R  
 See replacement wheel offerings next page.  
 Optional brake models. Black tread brake change last digit to 3. Grey tread brake change last digit to 5.



# DC Institutional



**TPR Rubber (31 Annular Ball Bearing)**

3	1 1/4	275	4 1/4	1 11/16	.5	DCXS03031S01
3	1 1/4	275	4 1/4	1 11/16	.5	DCXS03031
3 1/2	1 1/4	300	4 3/4	1 11/16	.5	DCXS03X31
4	1 1/4	325	5 1/16	1 11/16	.5	DCXS04031
5	1 1/4	350	6 3/16	1 11/16	.5	DCXS05031

**XS** Prevenz™ antimicrobial models available. Add PREV to end of caster number.  
 See replacement wheel offerings back cover.

# 02 Institutional



**X-tra Soft Rubber Flat Tread (51 Delrin Ball)\***

3	1 1/4	200	4 1/4	1 5/16	1.75	02XS03051
3 1/2	1 1/4	250	4 11/16	1 1/4	1.85	02XS03X51
4	1 1/4	300	5 1/8	1 1/4	2.00	02XS04051
5	1 1/4	325	6 3/16	1 1/2	2.25	02XS05051
6	1 1/4	350	7 1/4	1 1/2	2.40	02XS06051

\*Annular Ball (31) bearing available. Change "51" to "31" (Example: 02XS03031).  
**XS** Prevenz™ antimicrobial models available. Add PREV to end of caster number.

**Precision X-tra Soft Round Tread (28 Precision Ball Bearing)**

3	1 1/4	200	4 1/4	1 5/16	1.75	02XR03028
3 1/2	1 1/4	250	4 11/16	1 1/4	1.85	02XR03X28
4	1 1/4	300	5 1/8	1 1/4	2.00	02XR04028
5	1 1/4	325	6 3/16	1 1/2	2.25	02XR05028

Prevenz™ antimicrobial models available. Add PREV to end of caster number.  
**XR**

For swivel casters add "S" to end of model, for rigid add "R".

# 04 Stainless Steel Institutional



**X-tra Soft Rubber Flat Tread (51 Delrin Bearing)\***

3	1 1/4	200	4 1/4	1 5/16	1.50	04XS03051
3 1/2	1 1/4	250	4 11/16	1 1/4	1.75	04XS03X51
4	1 1/4	300	5 1/8	1 1/4	2.50	04XS04051
5	1 1/4	325	6 3/16	1 1/2	2.63	04XS05051

\*Plain bore bearing available. Change "51" to "41" (Example: 04XS03041).  
**XS** Prevenz™ antimicrobial models available. Add PREV to end of caster number.

**Precision X-tra Soft Round Tread (28 Precision Ball Bearing)**

3	1 1/4	200	4 1/4	1 5/16	1.50	04XR03028
3 1/2	1 1/4	250	4 11/16	1 1/4	1.75	04XR03X28
4	1 1/4	300	5 1/8	1 1/4	2.25	04XR04028
5	1 1/4	325	6 3/16	1 1/2	2.63	04XR05028

Prevenz™ antimicrobial models available. Add PREV to end of caster number.  
**XR**



# 16 Heavy Duty Casters



Swivel Lock ("L")

Grip Lock Brake ("GL")

Total Lock Brake: locks wheel and swivel ("T"). See load height note under chart.

For swivel models add "S" to end of caster number.  
For rigid models add "R" to end of caster number.

Wheel Diameter (Inches) | Tread Width (Inches) | Capacity (Lbs) (rated for normal operation) | Overall Height (Inches) | Swivel Lead (Inches) | Approx. Wt. (Lbs) | Caster Number

**X-tra Soft (Flat Tread) (01 Roller Bearing)\***

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	POPULAR MODEL!
4	2	350	5 <sup>5</sup> / <sub>8</sub>	1 <sup>11</sup> / <sub>16</sub>	5 <sup>1</sup> / <sub>4</sub>	<b>16XS04201</b>
5	2	375	6 <sup>1</sup> / <sub>2</sub>	1 <sup>5</sup> / <sub>8</sub>	5 <sup>1</sup> / <sub>2</sub>	<b>16XS05201</b>
6	2	600	7 <sup>1</sup> / <sub>4</sub>	1 <sup>3</sup> / <sub>4</sub>	6	<b>16XS06201</b>
8	2	675	9 <sup>1</sup> / <sub>2</sub>	1 <sup>3</sup> / <sub>4</sub>	6 <sup>1</sup> / <sub>2</sub>	<b>16XS08201</b>



XS

Prevenz™ antimicrobial models available. Add PREV to end of caster number.  
\*Precision Ball (28) and Delrin (51) Bearings available. Change "01" to other bearing code. Precision Ball example: 16XS04228, Delrin example: 16XS04251

**X-tra Soft (Round Tread) (01 Roller Bearing)\***

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	POPULAR MODEL!
6	2	600	7 <sup>1</sup> / <sub>4</sub>	1 <sup>3</sup> / <sub>4</sub>	5 <sup>1</sup> / <sub>2</sub>	<b>16XR06201</b>
8	2	675	9 <sup>1</sup> / <sub>2</sub>	1 <sup>3</sup> / <sub>4</sub>	6 <sup>1</sup> / <sub>2</sub>	<b>16XR08201</b>



XR

Prevenz™ antimicrobial models available. Add PREV to end of caster number.  
\*Precision Ball (28) and Delrin (51) Bearings available. Change "01" to other bearing code. Precision Ball example: 16XR04228, Delrin example: 16XR04251

For swivel casters add "S" to end of model, for rigid add "R".  
\*Standard load height is 7-1/4". To accommodate total lock brakes, optional load height of 7-1/2" is available, specify **HS60**. If ordering matching Rigid caster specify **HR60**.

See next page for replacement wheels.

# Replacement Wheels

## SF Brass Pneumatic Replacement Tire



Black Tread

Gray Tread

Wheel Diameter (Inches) | Tread Width (Inches) | Capacity (Lbs) (rated for normal operation) | Hub Length (Inches) | Bore ID (Inches) | Bearing ID (Inches) | Approx. Wt. (Lbs) | Wheel Number Industrial Ball (27)

**Black Tread**

8	2.50/4	210	2-7/16	1-3/8	1/2	3	SF084270805
---	--------	-----	--------	-------	-----	---	-------------

**Gray Tread**

8	2.50/4	210	2-7/16	1-3/8	1/2	3	SF084270806
---	--------	-----	--------	-------	-----	---	-------------

## NF Never-Flat™ Tires



8" Dia. Gray Tread

10" Dia. Black Tread

These Urethane tires never go flat!

Wheel Diameter (Inches) | Tire Size (Inches) | Capacity (Lbs) (rated for normal operation) | Hub Description | Bearing ID (Inches) | Approx. Wt. (Lbs) | Wheel Number Ball Bearing (27)

8	3	300	Offset 1-Piece Hub	1/2	4	NF0852708
8	3	300	Offset 1-Piece Hub	5/8	4	NF0852710
8	3	300	Centered 1-Piece Hub	1/2	4	NF0852708C
8	3	300	Offset 3-Piece Hub	1/2	4	NF0852708T
8	3	300	Offset 3-Piece Hub	5/8	4	NF0852710T
8	3	300	Centered 3-Piece Hub	1/2	4	NF0852708CT
8	3	300	Centered 3-Piece Hub	5/8	4	NF0852710CT

10	3-1/2	350	Offset 1-Piece Hub	1/2	5	NF1062708
10	3-1/2	350	Offset 1-Piece Hub	5/8	5	NF1062710
10	3-1/2	350	Offset 3-Piece Hub	1/2	5	NF1062708T
10	3-1/2	350	Offset 3-Piece Hub	5/8	5	NF1062710T
10	3-1/2	350	Centered 1-Piece Hub	5/8	5	NF1062710C
10	3-1/2	350	Centered 3-Piece Hub	1/2	5	NF1062708CT
10	3-1/2	350	Centered 3-Piece Hub	5/8	5	NF1062710CT

10" precision ball and roller bearing models available, roller bearing ID is 3/4".  
For precision ball models change 27 to 28. For roller bearing models change 27 to 01.

Replacement 10" diameter tire less hub available, specify NF1060022.  
Replacement parts available.

## Prevenz™ Antimicrobial

Prevenz™ suppresses growth of microbes with continuous cleaning action that protects the wheel from bacteria, mold & mildew that can cause stains and odor.



# Replacement Wheels

## PM Round Tread Polyurethane on Aluminum Core



Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Hub Length (Inches)	Bore ID (Inches)	Bearing ID (Inches)	Approx. Wt. (Lbs)	Wheel Number Precision Ball (28)
5	2	1000	2-7/16	1-9/16	1/2	2	PM0522808
6	2	1250	2-7/16	1-9/16	1/2	3	PM0622808
8	2	1500	2-7/16	1-9/16	1/2	4	PM0822808

## XR Round Tread Xtra Soft



Offset Hub  
Handtruck  
Replacement  
Wheel

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Hub Length (Inches)	Bore ID (Inches)	Bearing ID (Inches)	Approx. Wt. (Lbs)	Wheel Number Precision Ball (28)	Wheel Number Industrial Ball (27)
10	2	250	2-1/4	1-3/8	5/8	3	XR1022810	XR1022710
10	2	250	2-1/4	1-3/8	5/8	3	XR1022810	



Light Duty XR



Heavy Duty XR

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Hub Length (Inches)	Bore ID (Inches)	Bearing ID (Inches)	Approx. Wt. (Lbs)	Wheel Number Precision Ball (28)	Wheel Number Delrin Bearing (51)	Wheel Number Roller Bearing (01)
3	1-1/4	200	1-1/2	1-1/16	1/2	5/16	XR0302808		
3-1/2	1-1/4	250	1-1/2	1-1/16	1/2	5/16	XR03X2808		
4	1-1/4	300	1-1/2	1-1/16	1/2	3/8	XR0402808		
5	1-1/4	325	1-1/2	1-1/16	1/2	3/4	XR0502808		
6	2	450	2-3/16	1-3/16	3/4	1-3/8	XR0622808~	XR0625112	XR0620112~
6	2	450	2-7/16	1-9/16	1/2	1-3/8	XR0622808~		
8	2	600	2-3/16	1-3/16	3/4	2-3/8	XR0822808~	XR0825112	XR0820112~
8	2	500	2-7/16	1-9/16	1/2	2-3/8	XR0822808~		

NEW XZ Conductive models now available, change XR to XZ (Example: XZ0302808).

## XS Flat Tread Xtra Soft



Light Duty XS



Heavy Duty XS

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Hub Length (Inches)	Bore ID (Inches)	Bearing ID (Inches)	Approx. Wt. (Lbs)	Wheel Number Precision Ball (28)	Wheel Number Delrin Bearing (51)	Wheel Number Roller Bearing (01)
3	1-1/4	200	1-1/2	1-1/16	1/2	5/16	XS0305108		
3-1/2	1-1/4	250	1-1/2	1-1/16	1/2	5/16	XS03X5108		
4	1-1/4	300	1-1/2	1-1/16	1/2	3/8	XS0405108		
4	2	350	2-3/16	1-3/16	3/4	1	XS0425112	XS0420112~	
4	2	350	2-7/16	1-9/16	1/2	1	XS0422808*		
5	1-1/4	325	1-1/2	1-1/16	1/2	3/4	XS0505108		
5	2	375	2-3/16	1-3/16	3/4	1-1/8	XS0525112	XS0520112~	
5	2	375	2-7/16	1-9/16	1/2	1-1/8	XS0522808*		
6	1-1/4	325	1-1/2	1-1/16	1/2	3/4	XS0605108		
6	2	600	2-3/16	1-3/16	3/4	1-3/8	XS0625112	XS0620112~	
6	2	500	2-7/16	1-9/16	1/2	1-3/8	XS0622808*		
8	2	675	2-3/16	1-3/16	3/4	2-3/8	XS0825112	XS0820112~	
8	2	500	2-7/16	1-9/16	1/2	2-3/8	XS0822808*		

NEW XY Conductive models now available, change XS to XY (Example: XY0302808).

**ALBION**<sup>®</sup>  
www.albioninc.com  
800-835-8911



Registered to ISO9001: 2000  
File Number A10565

800 North Clark Street • Albion, MI 49224  
FAX 517-629-9501

©COPYRIGHT 2006 ALBION INDUSTRIES, INC  
08/06 LI00032